


PNM METER STANDARD

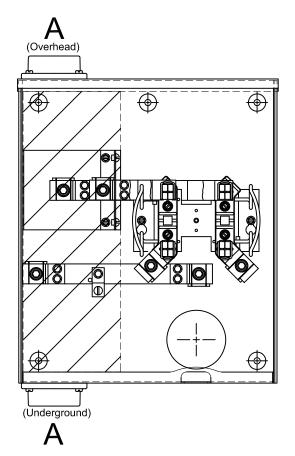





## **Allowable Uses**

- Permanent 120/240 Overhead and Underground Services
- Permanent Customer Owned Underground Services
- Temporary Overhead and Underground Service

## **NOTES**

- (1) Socket to be Underwriters Laboratory (UL) listed.
- (2) Connections for terminating service conductors shall be the lay-in type.
- (3) Service conduit to enter at point "A"
- (4) No load conduits or load conductors in shaded area from front to back.
- (5) PNM will make line terminations on underground permanent residential services only.
- (6) 125A is only applicable for manufactured, mobile homes, temporary overhead and underground service and replacing existing 100A or less meter socket.
- (7) Meter shall be 4' 5' 6" from finished grade.
- (8) If load is >320A, must use use MS-3-7.0.
- (9) PNM does not permit a trough ahead of meter socket.
- (10) Metering and instrument cabinets shall not be used to house Customer-owned equipment, such as distribution panels or other equipment, nor used as a junction box/trough for the distribution of circuits.
- (11) Customer building numbers must be permanently painted on proper meter panels.

## REFERENCES

- (1) See DS-4-5.0 Underground Service Entrance System
- (2) See DM-4-11.0 Maximum Available Fault Current
- (3) See MS-3-7.0 Over 320A 240V Single-Phase Meter

Approved Equipment		
Manufacturer	Item	Mfg Part #
Eaton Eaton Eaton Eaton Milbank Milbank Milbank Milbank Milbank Siemens Siemens Siemens Square D Square D Square D	125A UG Ringless Socket 125A UG Ringless Socket 200A OH/UG Ringless Socket 200A OH/UG Ringless Socket 200A UG Ringless Socket 200A OH/UG Ringless Socket 200A OH/UG Ringless Socket 100A OH/UG Ringless Socket	UTR\$101BE UTR\$101CE UTR\$213CE U92197CCCPLCH 1008617CCH U7021-RL-TG U1980-O U4413-O U3850-O-TG U8173-XL-KK-BLG UAS877-PG UAS817-PGP UAS817-PGP UTR\$101B U92197CCCPL RC1624M100S RC816F100CH

For ease of checking service without interruption, PNM will no longer allow ring meter sockets as of 12/01/2013.